


Prescription Selection Chart

Power (D)	Diameter (mm)	Center Thickness* (mm)	Edge Thickness* (mm)
+3.00	65	3.5	0.8
+2.75	65	3.3	0.8
+2.50	65	3.1	0.8
+2.25	65	2.8	0.8
+2.00	65	2.6	0.8
+1.75	65	2.6	1.0
+1.50	65	2.5	1.1
+1.25	65	2.4	1.2
+1.00	65	2.3	1.4
+0.75	65	2.2	1.6
+0.50	65	2.2	1.7
+0.25	65	2.1	1.8
+0.00	70	2.0	2.0
-0.25	70	2.0	2.3
-0.50	70	1.9	2.5
-0.75	70	1.9	2.7
-1.00	70	1.9	3.0
-1.25	70	1.8	3.2
-1.50	70	1.8	3.5
-1.75	70	1.7	3.6
-2.00	70	1.7	3.9
-2.25	70	1.7	4.2
-2.50	70	1.6	4.4
-2.75	70	1.6	4.7
-3.00	70	1.5	4.8
-3.25	70	1.5	5.2
-3.50	70	1.4	5.4
-3.75	70	1.4	5.6
-4.00	70	1.3	5.8
-4.25	70	1.3	6.2
-4.50	70	1.3	6.5
-4.75	70	1.3	6.8
-5.00	70	1.3	7.0
-5.25	70	1.3	7.5
-5.50	70	1.3	7.8
-5.75	70	1.3	8.0
-6.00	70	1.3	8.3
-6.25	70	1.3	8.9
-6.50	70	1.3	9.2
-6.75	70	1.3	9.4
-7.00	70	1.3	9.7
-7.25	70	1.3	10.5
-7.50	70	1.3	10.7
-7.75	70	1.3	11.0
-8.00	70	1.3	11.2

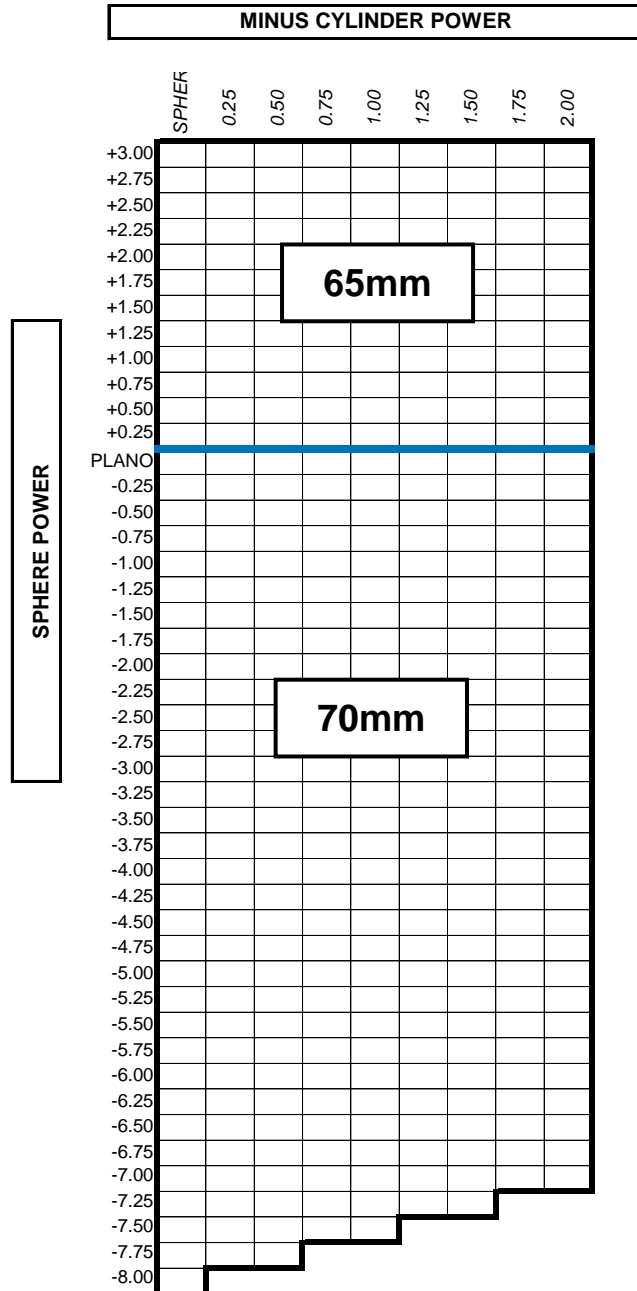

*Ranges of up to +/-0.2mm for the same power but different cylinders. Check the Lens Description Standard (LDS) files for exact values.