


Prescription Selection Chart

Power (D)	Diameter (mm)	Center Thickness ¹ (mm)	Edge Thickness ² (mm)	Diameter (mm)	Center Thickness ¹ (mm)	Edge Thickness ² (mm)
+4.00	65	5.2	0.8			
+3.75	65	4.9	0.8			
+3.50	65	4.6	0.7			
+3.25	65	4.4	0.8			
+3.00	65	4.1	0.8			
+2.75	65	3.8	0.8			
+2.50	65	3.6	0.8			
+2.25	65	3.3	0.8			
+2.00	65	3.0	0.8			
+1.75	65	2.9	1.0			
+1.50	65	2.7	1.0			
+1.25	65	2.5	1.0			
+1.00	65	2.2	1.1			
+0.75	65	2.2	1.4			
+0.50	65	2.1	1.6			
+0.25	65	1.9	1.6			
+0.00				70	2.2	2.2
-0.25				70	2.0	2.4
-0.50				70	2.0	2.7
-0.75				70	2.0	3.0
-1.00				70	2.0	3.4
-1.25				70	2.0	3.8
-1.50				70	2.0	4.1
-1.75				70	2.0	4.4
-2.00				70	2.0	4.7
-2.25				70	2.0	5.1
-2.50				70	2.0	5.4
-2.75				70	2.0	5.7
-3.00				70	2.0	6.0
-3.25				70	2.0	6.3
-3.50				70	2.0	6.6
-3.75				70	2.0	6.9
-4.00				70	2.0	7.2

MINUS CYLINDER POWER

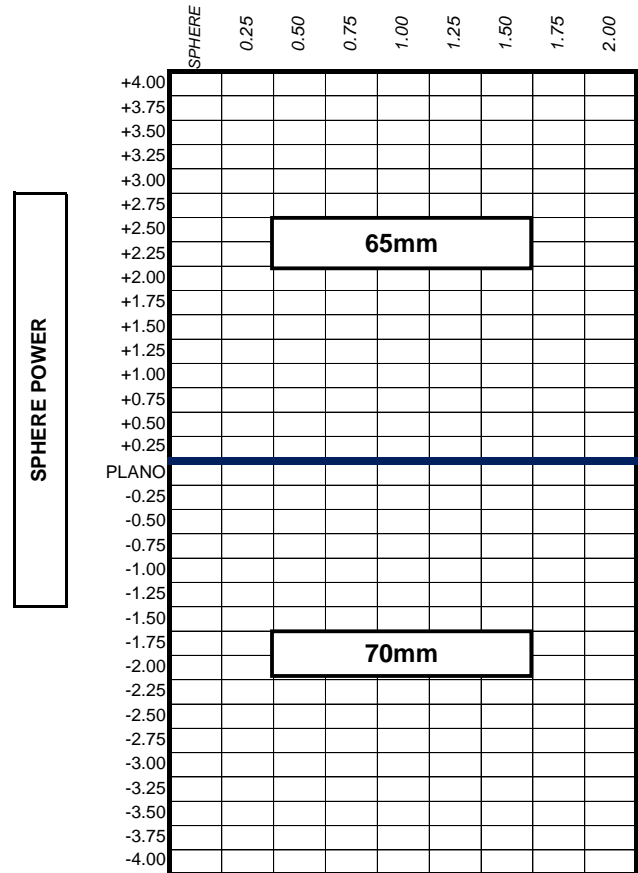

¹Ranges of up to +/-0.2mm for the same power.

²Shown are the edge thickness for the powers with a 0 cylinder. Check the Lens Description Standard (LDS) files for the values for the other cylinders.