


Prescription Selection Chart

Power (D)	Diameter (mm)	Center Thickness* (mm)	Edge Thickness (mm)
+4.00	70	6.4	1.0
+3.75	70	6.1	1.1
+3.50	70	5.8	1.2
+3.25	70	5.5	1.2
+3.00	70	5.1	1.1
+2.75	70	4.8	1.2
+2.50	70	4.5	1.2
+2.25	70	4.2	1.2
+2.00	70	4.2	1.6
+1.75	70	3.8	1.5
+1.50	70	3.5	1.6
+1.25	70	3.2	1.6
+1.00	70	3.1	1.8
+0.75	70	2.7	1.7
+0.50	70	2.4	1.8
+0.25	70	2.1	1.8
+0.00	70	2.2	2.2
-0.25	70	2.0	2.4
-0.50	70	2.0	2.7
-0.75	70	2.0	3.0
-1.00	70	2.0	3.4
-1.25	70	2.0	3.8
-1.50	70	2.0	4.1
-1.75	70	2.0	4.4
-2.00	70	2.0	4.7
-2.25	70	2.0	5.1
-2.50	70	2.0	5.4
-2.75	70	2.0	5.7
-3.00	70	2.0	6.0
-3.25	70	2.0	6.3
-3.50	70	2.0	6.6
-3.75	70	2.0	6.9
-4.00	70	2.0	7.2
-4.25	70	2.0	7.6
-4.50	70	2.0	7.9
-4.75	70	2.0	8.2
-5.00	70	2.0	8.5
-5.25	70	2.0	9.0
-5.50	70	2.0	9.3
-5.75	70	2.0	9.6
-6.00	70	2.0	9.9

SPHERE POWER

MINUS CYLINDER POWER

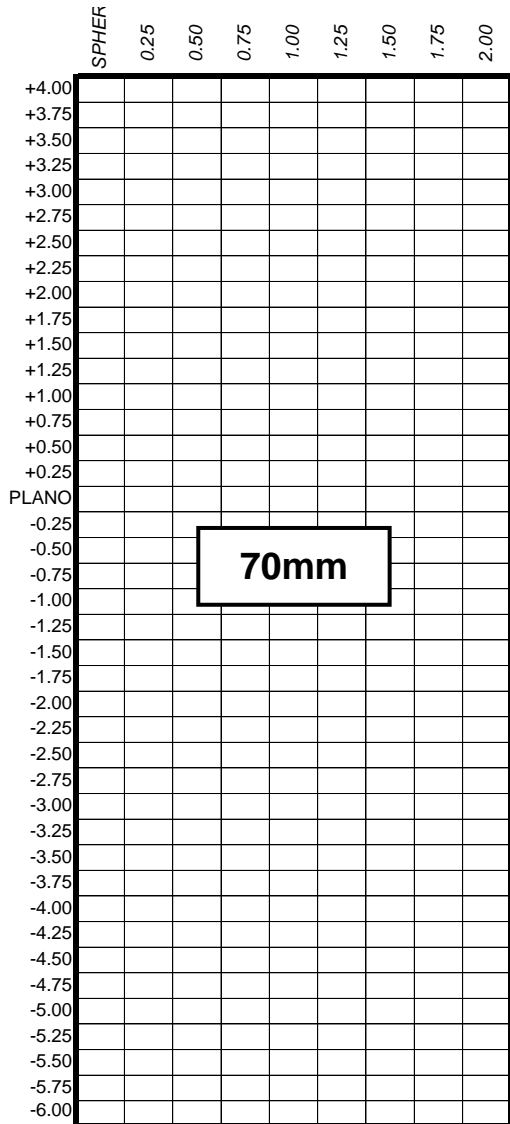

¹Ranges of up to +/-0.2mm for the same power

²Shown are the edge thicknesses for powers with a 0 cylinder. Check the Lens Description Standard (LDS) file for values for the other cylinders