


Prescription Selection Chart

Power (D)	Diameter (mm)	Center Thickness ¹ (mm)	Edge Thickness ² (mm)	Diameter (mm)	Center Thickness ¹ (mm)	Edge Thickness ² (mm)
+3.00	65	3.9	0.8			
+2.75	65	3.6	0.8			
+2.50	65	3.4	0.8			
+2.25	65	3.1	0.8			
+2.00	65	2.9	0.8	70	3.2	0.8
+1.75	65	2.7	0.9	70	3.0	0.9
+1.50	65	2.6	1.1	70	2.9	1.1
+1.25	65	2.5	1.2	70	2.7	1.2
+1.00	65	2.4	1.4	70	2.6	1.4
+0.75	65	2.3	1.5	70	2.4	1.5
+0.50	65	2.2	1.7	70	2.3	1.7
+0.25	65	2.1	1.9	70	2.1	1.8
+0.00				70	2.0	2.0
-0.25				70	1.9	2.3
-0.50				70	1.8	2.5
-0.75				70	1.6	2.9
-1.00				70	1.5	3.0
-1.25				70	1.4	3.4
-1.50				70	1.3	3.7
-1.75				70	1.3	3.9
-2.00				70	1.3	4.2
-2.25				70	1.3	4.4
-2.50				70	1.3	4.8
-2.75				70	1.3	5.0
-3.00				70	1.3	5.3
-3.25				70	1.3	5.5
-3.50				70	1.3	5.8
-3.75				70	1.3	6.1
-4.00				70	1.3	6.3
-4.25				70	1.3	6.6
-4.50				70	1.3	7.0
-4.75				70	1.3	7.3
-5.00				70	1.3	7.6
-5.25				70	1.3	7.9
-5.50				70	1.3	8.2
-5.75				70	1.3	8.7
-6.00				70	1.3	9.0
-6.25				70	1.3	9.3
-6.50				70	1.3	9.6
-6.75				70	1.3	9.8
-7.00				70	1.3	10.4
-7.25				70	1.3	10.7
-7.50				70	1.3	11.0
-7.75				70	1.3	11.3
-8.00				70	1.3	11.6

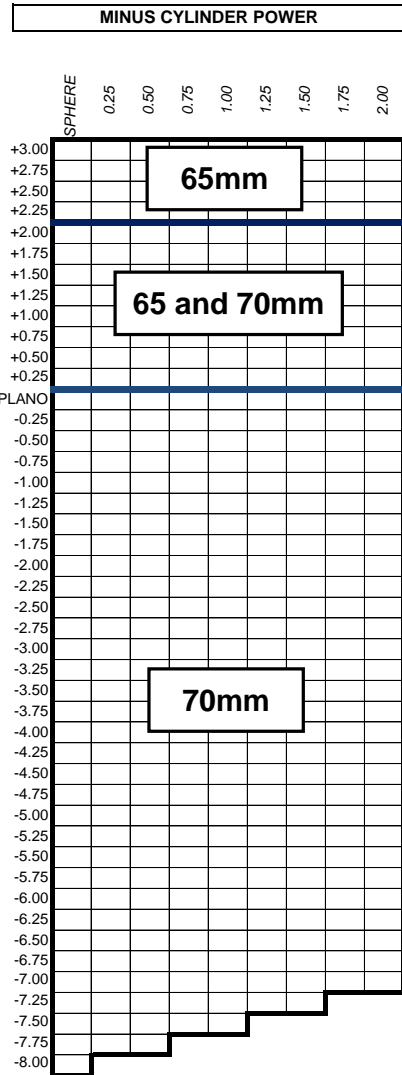

¹Ranges of up to +/-0.2mm for the same power

²Shown are the edge thicknesses for powers with a 0 cylinder. Check the Lens Description Standard (LDS) file for values for the other cylinders.